
# 2001-2005 Honda Civic Battery Replacement

How to replace a dead battery.


Written By: Tyler Smith

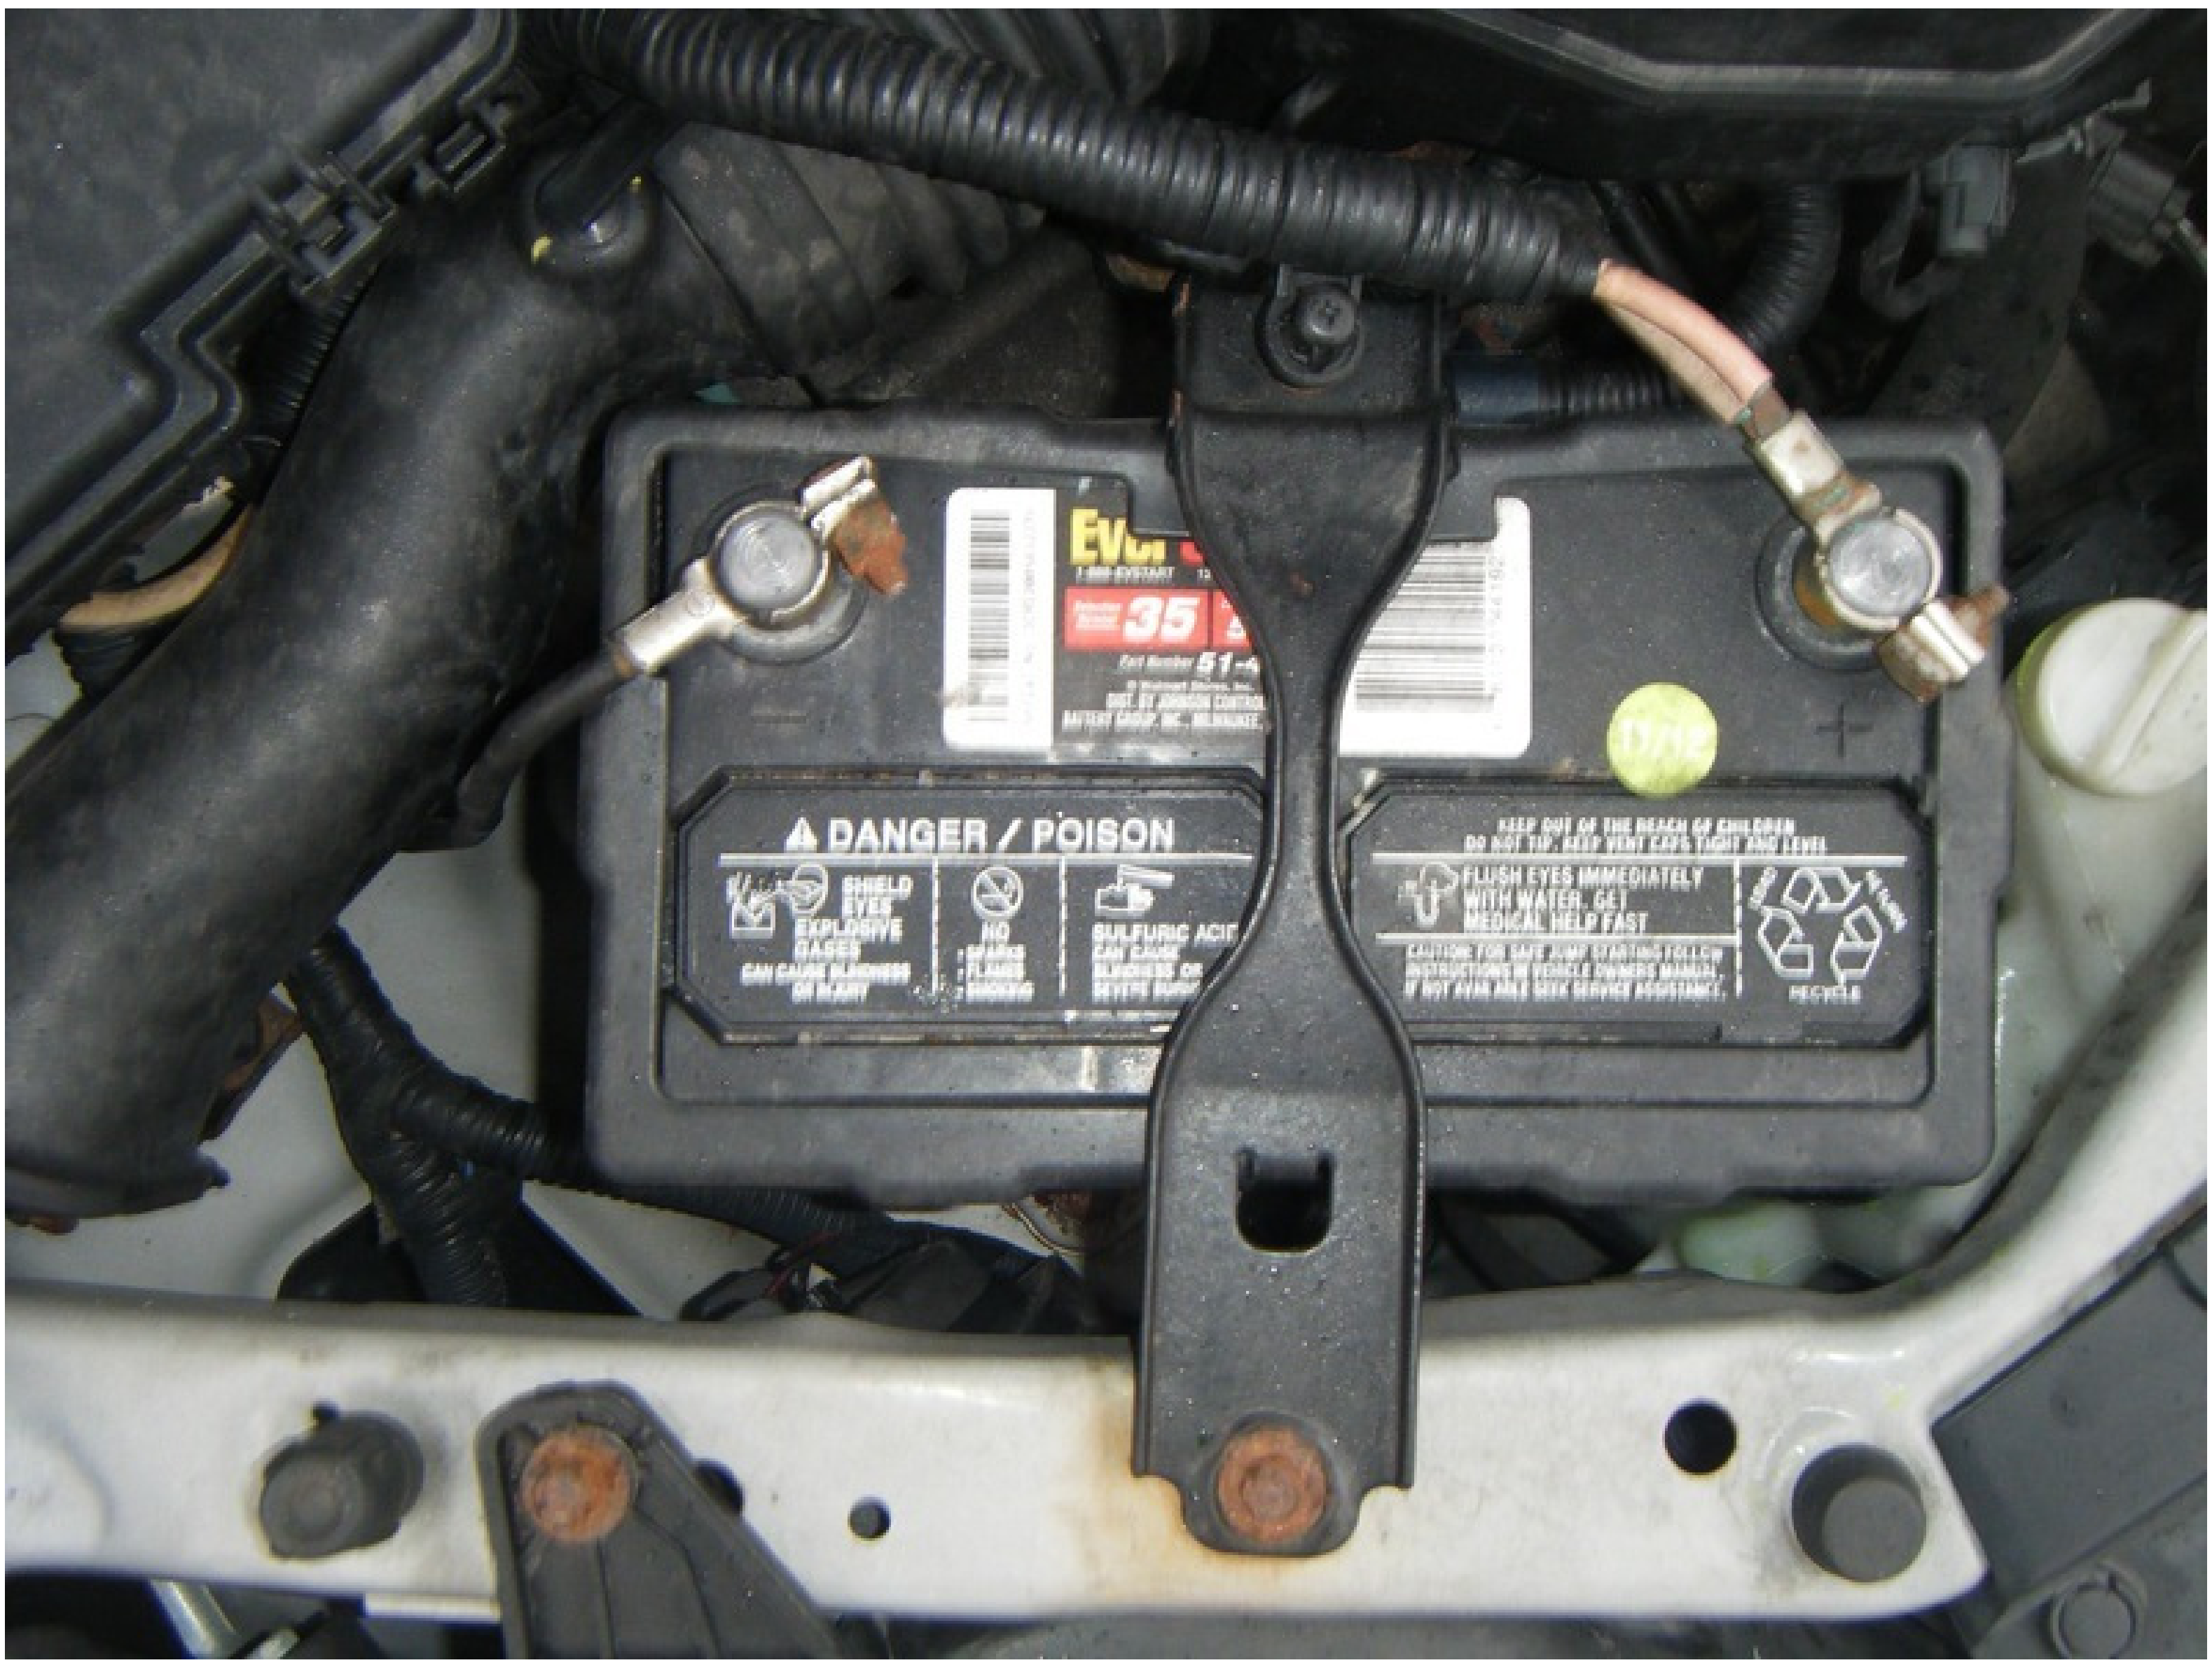

## TOOLS:


- Socket Wrench (1)

## Step 1 — Battery

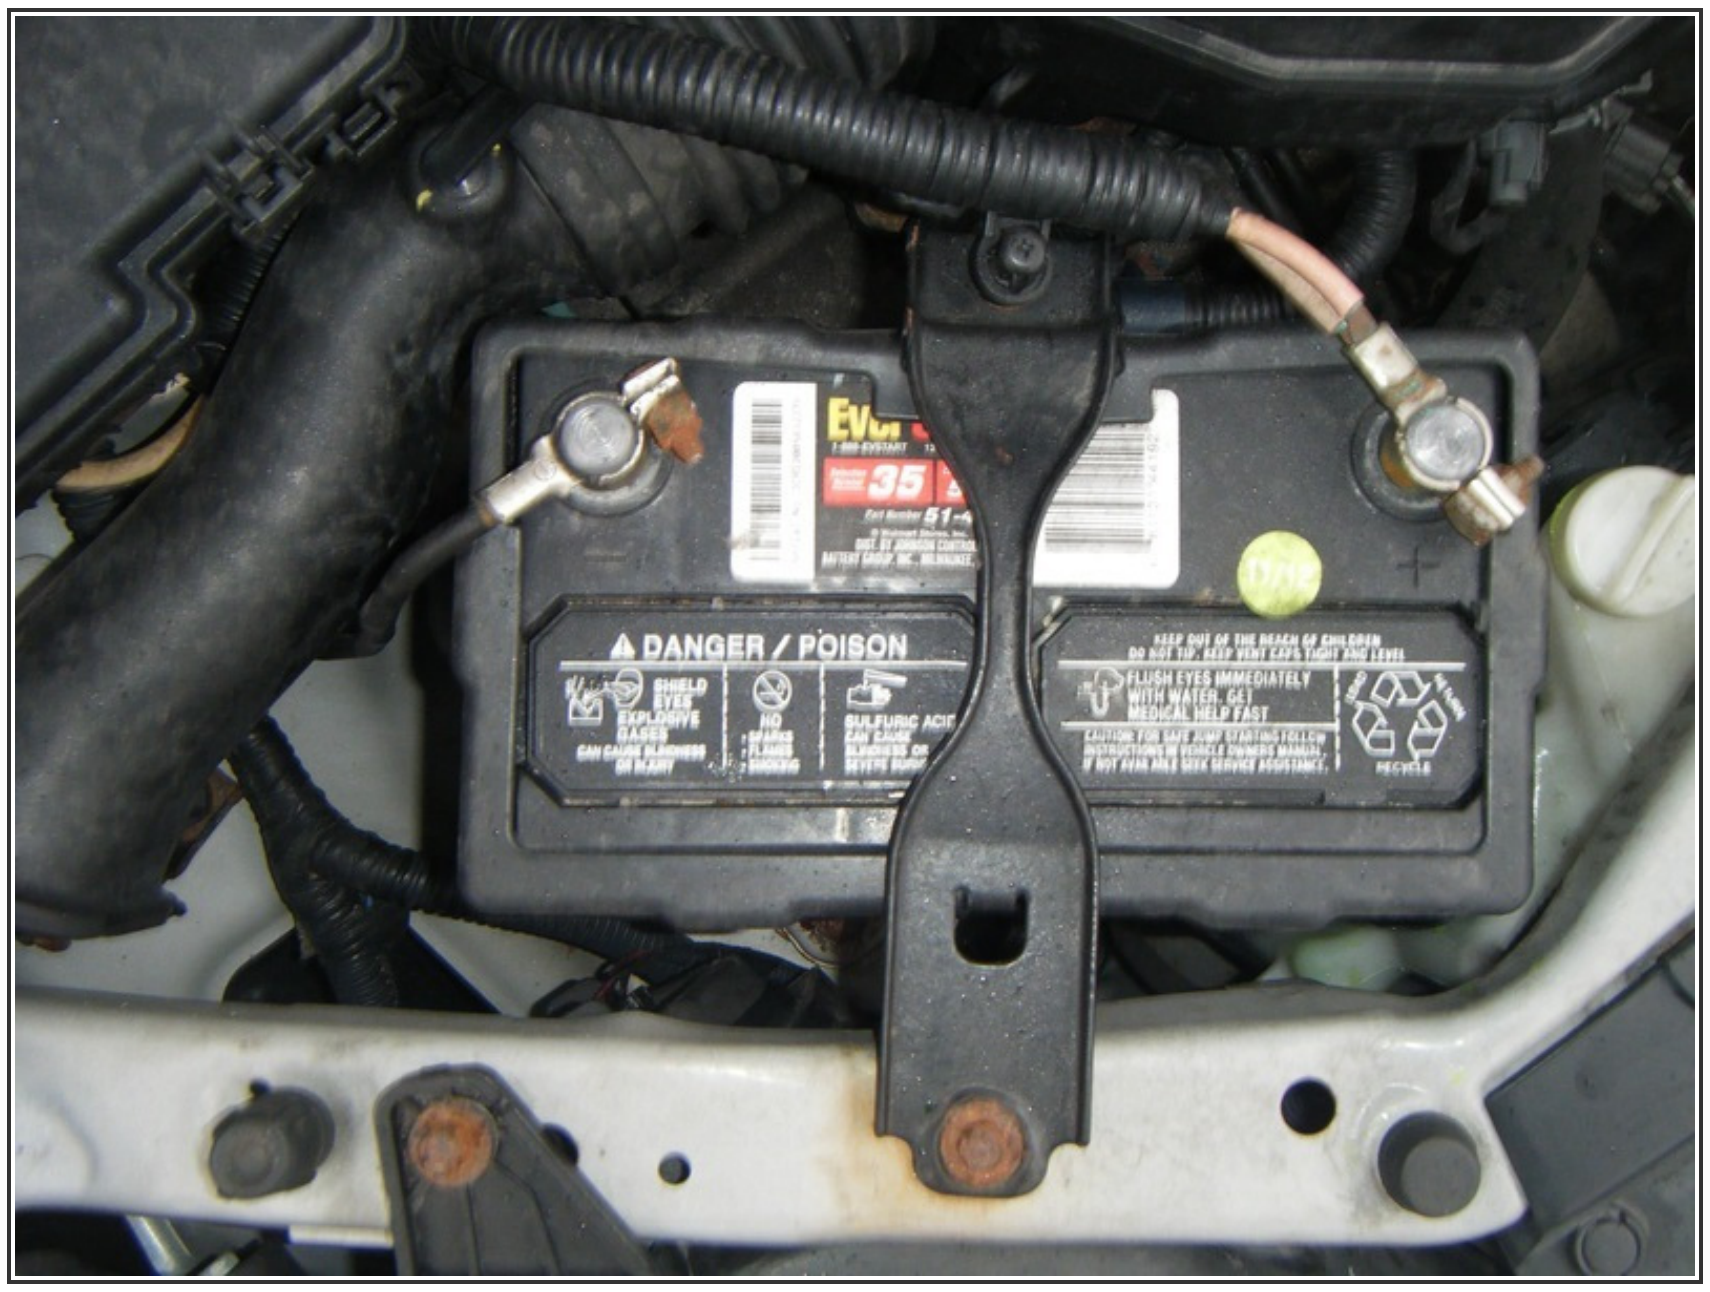


⚠ Caution! Vehicle must be turned off before attempting this replacement. Touching the battery terminals while the car is running may cause risk of electrocution.


## Step 2

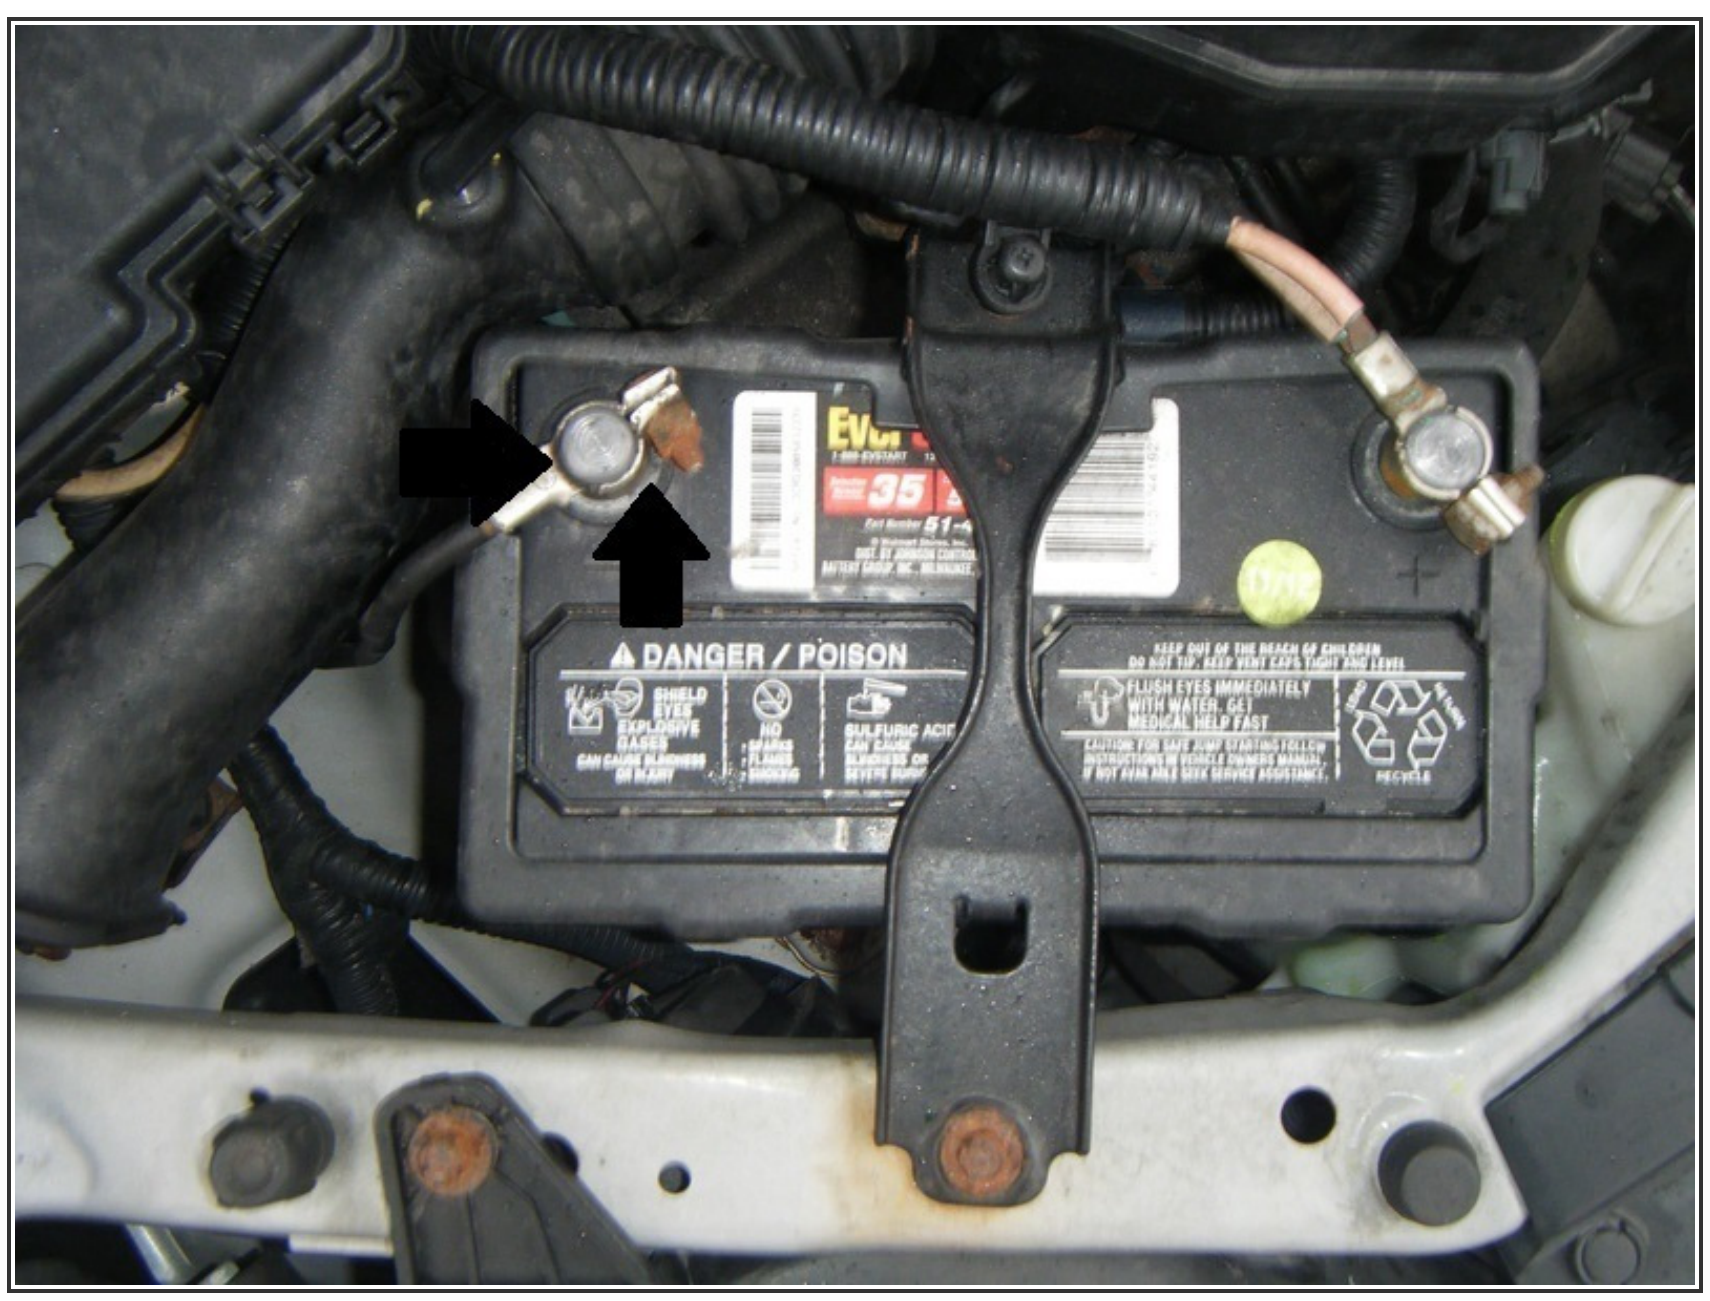


- Remove the connections from both the negative and the positive terminals of the battery


⚠ When removing the battery, the negative terminal must be removed first. When re-installing the battery, the positive must be connected first.

## Step 3

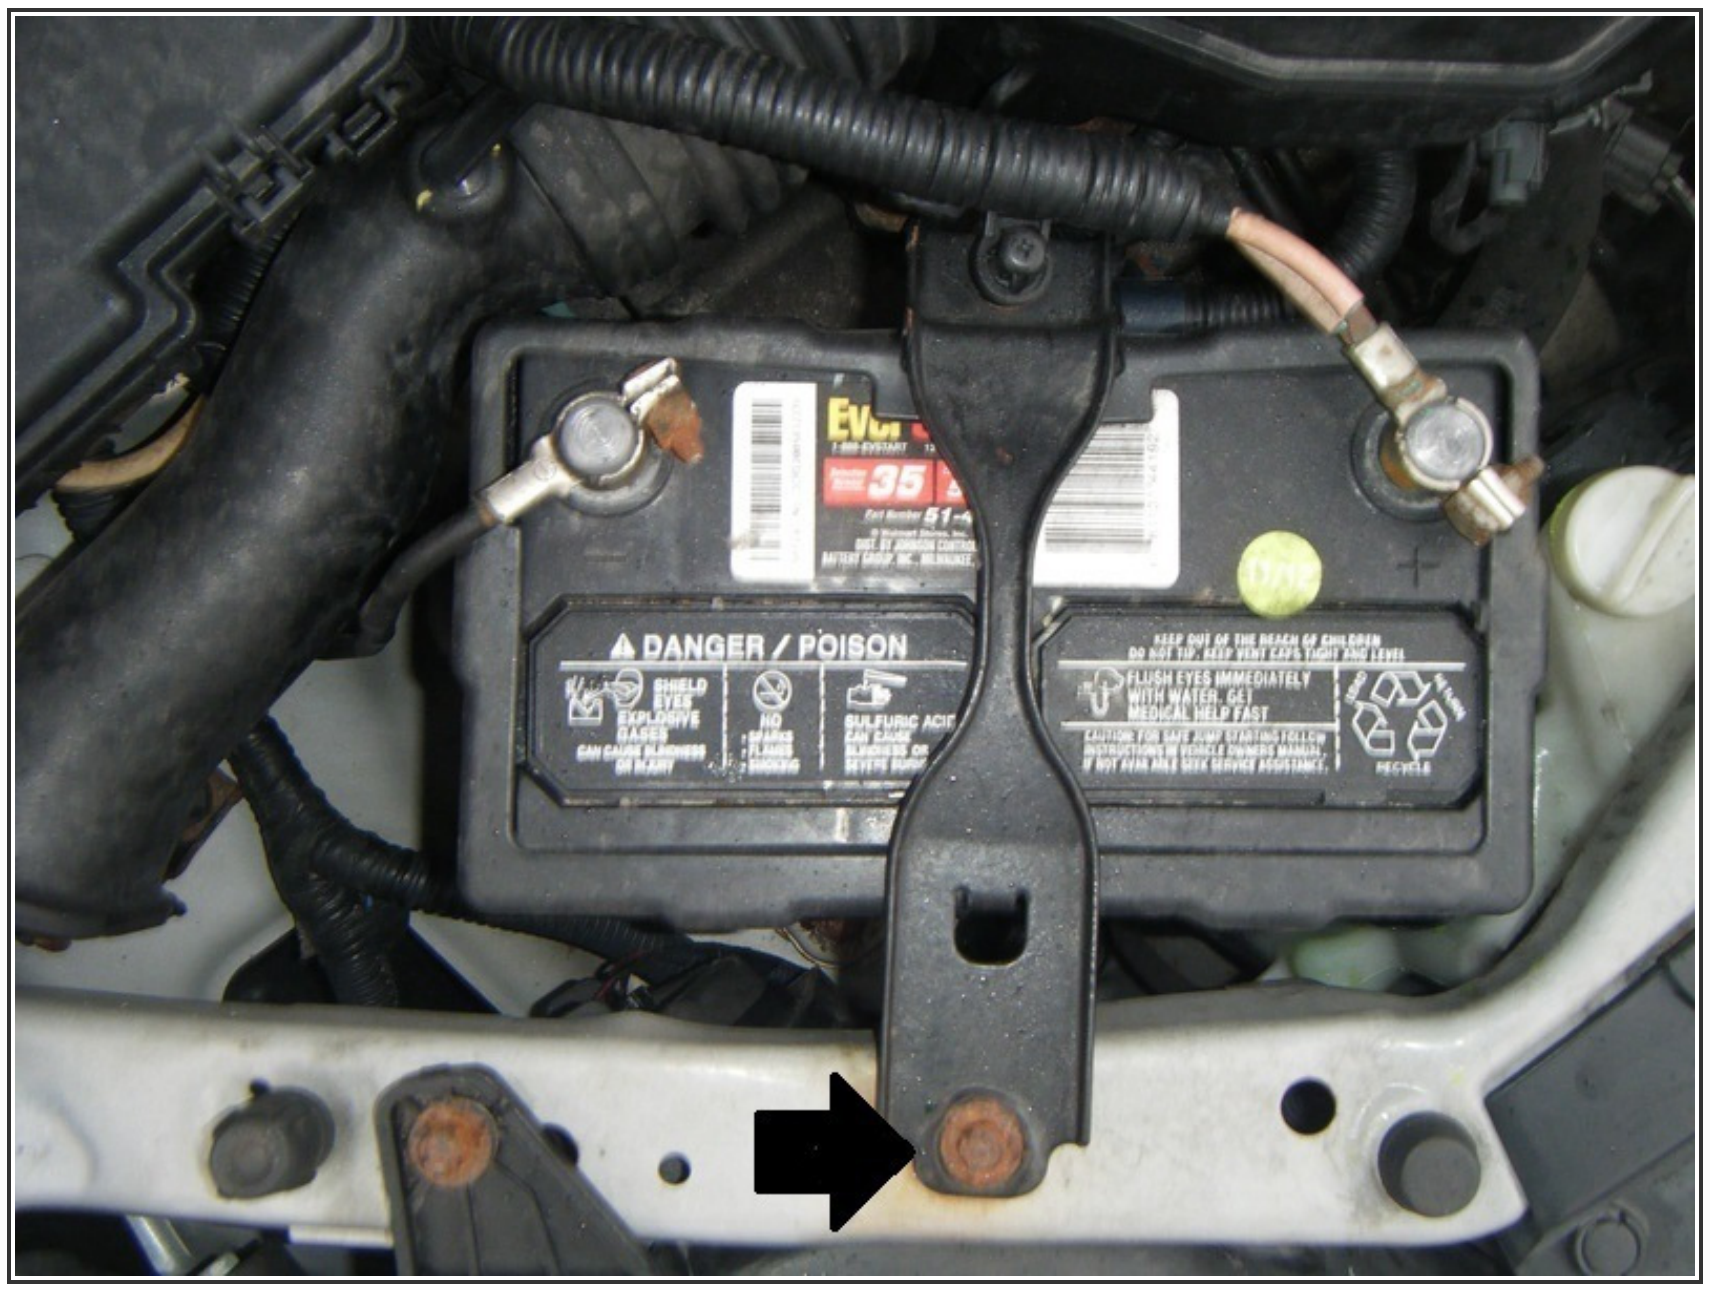

- Using a socket wrench, remove the battery bracket from the top of the battery.
- ⓘ Depending on the condition of the car, the bolts may be rusted, making the removal of them a challenge.

## Step 4

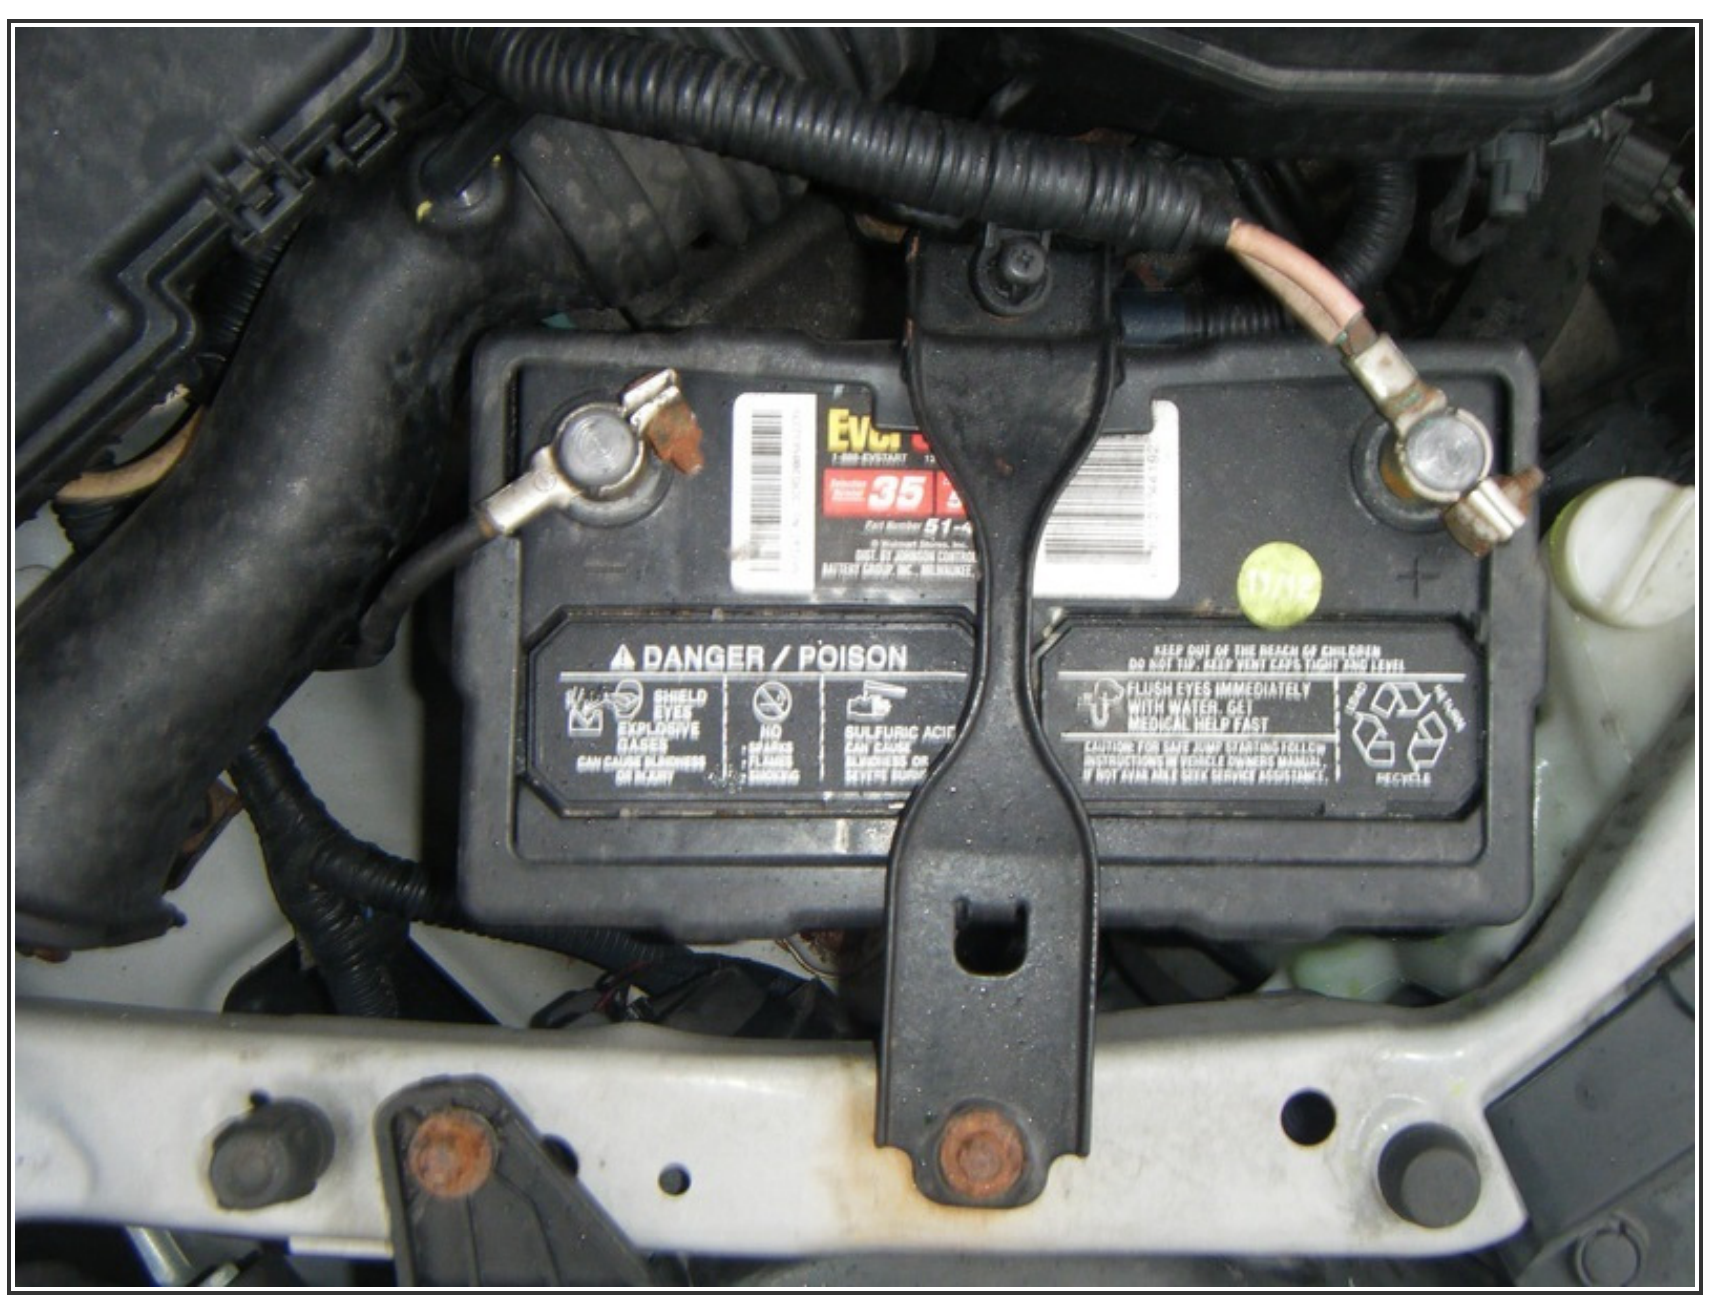

- ⚠ Ensure that there are no connections remaining on the battery.
- Lift up the battery and remove it from the battery tray.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 08:45:27 AM.